


Dealer:	Date:	<input type="checkbox"/> Quote Only <input type="checkbox"/> Dealer PO
Attn:	Phone:	Fax:
<b>ROOF ACCESS HATCH</b>		

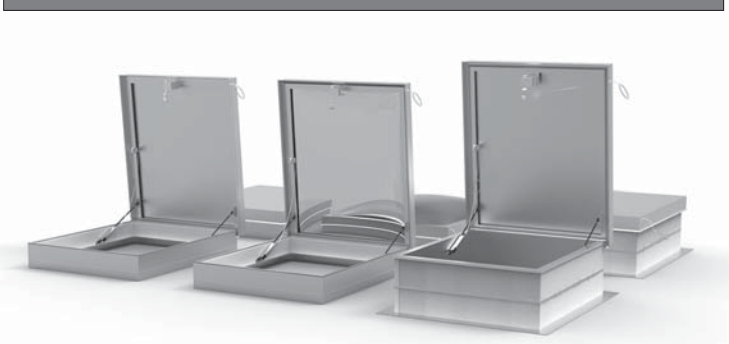

	CURB MOUNT METAL LID	CURB MOUNT DOME LID	SELF FLASHING CURB METAL LID
<b>QTY</b>			
<b>FINISH</b>	<input type="checkbox"/> mill <input type="checkbox"/> _____	<input type="checkbox"/> mill <input type="checkbox"/> _____	<input type="checkbox"/> mill <input type="checkbox"/> _____
<b>CURB HEIGHT</b>	NA	NA	<input type="checkbox"/> 12" (standard) <input type="checkbox"/> _____
<b>STANDARD SIZE BY ROUGH OPENING</b>	<b>WIDTH (hinge) x LENGTH</b> <input type="checkbox"/> 36" x 30" 39" x 33" outside curb <input type="checkbox"/> 30" x 36" 33" x 39" outside curb <input type="checkbox"/> 64" x 36" 67" x 39" outside curb <input type="checkbox"/> 48" x 48" 51" x 51" outside curb	<b>WIDTH (hinge) x LENGTH</b> <input type="checkbox"/> 36" x 30" 39" x 33" outside curb <input type="checkbox"/> 30" x 36" 33" x 39" outside curb <input type="checkbox"/> 64" x 36" 67" x 39" outside curb <input type="checkbox"/> 48" x 48" 51" x 51" outside curb	<b>WIDTH (hinge) x LENGTH</b> <input type="checkbox"/> 36" x 30" <input type="checkbox"/> 30" x 36" <input type="checkbox"/> 64" x 36" <input type="checkbox"/> 48" x 48"
<b>CUSTOM SIZE</b>	<b>WIDTH (hinge) x LENGTH</b> OUTSIDE CURB DIM <input type="checkbox"/> ____ X ____	<b>WIDTH (hinge) x LENGTH</b> OUTSIDE CURB DIM <input type="checkbox"/> ____ X ____	<b>WIDTH (hinge) x LENGTH</b> ROUGH OPENING <input type="checkbox"/> ____ X ____
<p><b>NOTE:</b> Hinge must be on the long dimension.</p> <p><b>NOTE:</b> Standard hardware limits total lid size to approx. 16 sq. ft.</p>			
<b>LID TYPE</b>	<b>FLAT LID</b> <input type="checkbox"/> aluminum	<b>DOUBLE DOME</b> <input type="checkbox"/> clear / clear <input type="checkbox"/> white / clear	<b>FLAT LID</b> <input type="checkbox"/> aluminum
<b>MANUAL RELEASE</b>	interior included <input type="checkbox"/> add exterior	interior included <input type="checkbox"/> add exterior	interior included <input type="checkbox"/> add exterior
<b>ACCESSORIES</b>		<input type="checkbox"/> 12" Insulated Self Flashing Curb	

**Standard Specifications**

- Engineered with gas struts to provide smooth, easy, one-hand operation, regardless of size.
- Automatic hold-open arm locks the cover in the open position to ensure safe egress.
- Overlapping cover design, full welded corners on cover and curb, EPDM rubber gasket, and fully insulated cover and curb ensure weather tightness and energy efficiency.
- Constructed with corrosion resistant materials to provide many years of trouble free, dependable service.
- Heavy gauge construction and positive latching mechanism to maintain building security.
- Material: Aluminum cover and frame.
- Cover: Brakeformed, hollow-metal design with 1" (25 mm) concealed XPS insulation, fully welded corners and seams, and internally reinforced for 40 psf (195 kg/m<sup>2</sup>) live load.
- Gasket: Extruded EPDM rubber gasket permanently adhered to cover.
- Hinges: Heavy-duty full length corrosion resistant aluminum hinge.
- Latch: Slam latch with interior turn handle, padlock feature and exterior cable release.
- Lift Assistance: Telescoping gas struts with automatic hold-open mechanism and one handed cable release system.
- Performance Ratings: Complies with UL 790 Class A.
- Finish: Aluminum: Mill Finish.
- Hardware: All other hardware is zinc plated/chromate sealed.

Estimated Dealer Cost   
*quote good for 30 days*



**EVERETT**  
 phone: 1-800-666-6065  
 fax: 425-258-6734

**SPOKANE**  
 phone: 1-800-382-5403  
 fax: 509-921-2137

**SALEM**  
 phone: 1-800-664-1257  
 fax: 503-391-0974