

**SERIES
4843**

COUNTER FLASHING
AS REQ., N.B.C.

.050 AL.
HEAD FLASHING

FACE OF WALL

REF DIM


FIELD
EASTENERS N.B.C.

CONT. WET SEAL


30159 AL.
LEDGER

1" O.A.
INSUL. UNIT

4839 AL. RAFTER
AS OCCURS



GENERIC GLAZING DETAILS.
ACTUAL DESIGN AND MAKE-UP VARY AS REQUIRED.

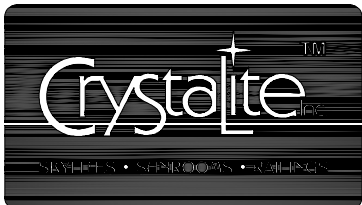

4843 Head at Wall

NAMI certified and rated by NFRC for thermal performance. Compliant to International Building Code; structural deflection limited to L/175 per ASTM E 330, air infiltration tested per ASTM E 283 at 6.24 psf, water penetration tested per ASTM E 331 at 30.00 psf.