

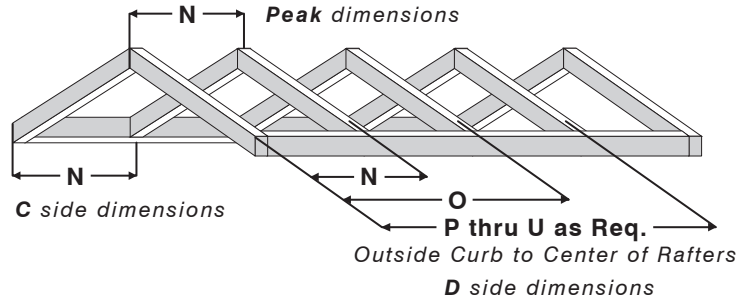


Dealer / Contact	Date
Email / Phone	<input type="checkbox"/> Quote Only <input type="checkbox"/> Dealer PO
RIDGE	

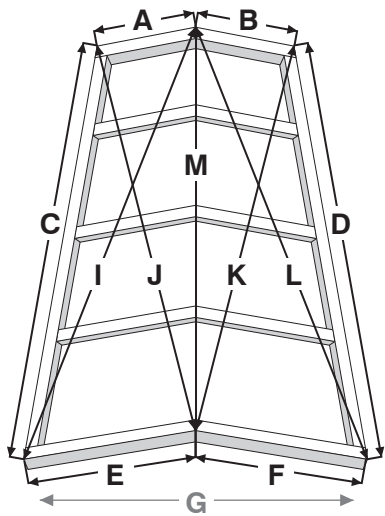


* check the appropriate side if a wall is present

Outside Curb Dimensions				
inches		wall	inches	
A			I	
B			J	
C			K	
D			L	
E			M	
F			Roof Pitch	
			G	

Existing Mullion Supports? <input type="checkbox"/> Yes <input type="checkbox"/> No			
Number of Lites			
Mullion Spacing from OCD to Rafter Centers			
inches		inches	
N	D side	R	D side
	Peak		Peak
	C side		C side
O	D side	S	D side
	Peak		Peak
	C side		C side
P	D side	T	D side
	Peak		Peak
	C side		C side
Q	D side	U	D side
	Peak		Peak
	C side		C side

Curb Condition see page 2 to record curb material make-up

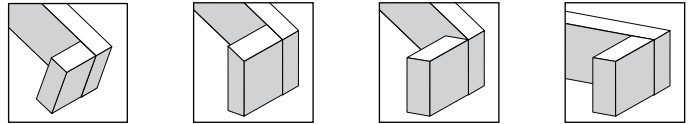


90° Curb to Roof Pitch
 Plumb Curb Cut To Pitch
 Plumb Curb Flat Top
 Flat Roof
Typical

O.A. Finished Curb Thickness: _____"
 Please note if head and sill curb conditions vary.


Curb Height: _____"

O.A. Finished Rafter Thickness: _____"



Roof Material: _____

Roof Pitch in Degrees: _____

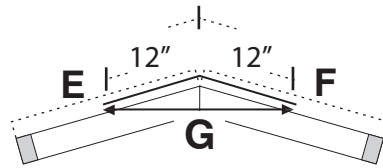

G measurement is taken from 12" down the slope from the apex of the ridge. These dimensions verify the roof pitch

12"
 Minimum 2/12 pitch required for all glass.

Frame Color _____

Bronze Anodized
 Clear Anodized

Glazing Type _____

Residential Commercial
 Laminated or Polycarb. Glazing Required