

Dealer:

Date:

Quote Only
 Dealer PO


Attn:

Phone:

Fax:

VENTING SKYLIGHT ORDER FORM

MODEL	OUTSIDE CURB	SIZE
1838	17.5" x 37.5"	SOLAR SMART NOT AVAILABLE
1850	17.5" x 49.5"	
1874	17.5" x 73.5"	
2626	25.5" x 25.5"	2x2
2634	25.5" x 33.5"	2x3
2638	25.5" x 37.5"	
2650	25.5" x 49.5"	
2662	25.5" x 61.5"	2x4
2674	25.5" x 73.5"	
2698	25.5" x 97.5"	2x6
3434	33.5" x 33.5"	
3438	33.5" x 37.5"	3x3
3450	33.5" x 49.5"	
3474	33.5" x 73.5"	3x4
3838	37.5" x 37.5"	
3850	37.5" x 49.5"	3x5
3862	37.5" x 61.5"	
3874	37.5" x 73.5"	3x6
3898	37.5" x 97.5"	
5050	49.5" x 49.5"	4x4
5062	49.5" x 61.5"	
5074	49.5" x 73.5"	

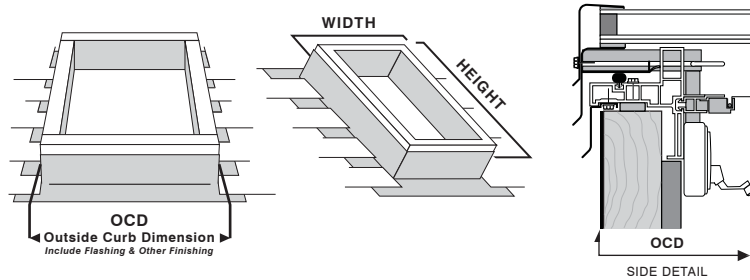

Indicate Sizes by Model Number OR Outside Curb Dimension


QTY	Model Number	OCD Outside Curb Dimension		Dealer Cost
		width (in.)	height (in.)	
1				
2				
3				
4				
5				

OPENING FRAMES


- 5830 (recommended)
- 3962
- 3921

Note: Standard Skylight Order Form is available.

CURB TYPE



Typical



Typical *only if* curb built-up to minimum 2/12 pitch required on a flat roof. (NA for 5830)

90° Curb to Roof Pitch

Plumb Curb Cut To Pitch

ROOF PITCH

Minimum 2/12 pitch required for all glass skylights.

12

INSTALLATION LOCATION

Residential Commercial

Laminated or Plastic Glazing Required on all commercial installations and some residential depending on height and size.

GLAZING OPTIONS

Single / Monolithic

- Tempered
- Laminated

Color

- Clear Bronze
- White _____

Insulating Glass Unit

- Temp / Temp
- Temp / Lam
- Temp / FTL

Color

- Clear / Clear
- Bronze / Clear
- Clear / White (lam)
- _____

Dome / Formed Pyramid

- Double
- Triple

Color

- Clear Bronze
- White _____

LOW-E & ARGON *for glass units only (recommended)

- LoE 272 LoE 180
- LoE 366 (standard)
- _____

OPERATOR HARDWARE OPTIONS

Manual Opener

- Truth Chain Drive (standard)
 - Hand Angle Drive (reachable)
 - Pole Straight Drive
 - 3'- 5' Pole 6'-10' Pole
- Dazon Threaded Rod
 - Pole Straight Drive
 - 3'- 5' Pole 6'-10' Pole

Solar Smart Opener (solar charged, battery powered)

- Standard Kit w/ 10 ft. pigtail (standard)
- Standard Kit w/ custom length pigtail length _____
- Additional Extension Wire w/ Plugs length _____

STEP FLASHING KIT (COMPOSITE & SHINGLE ROOFS ONLY)

Curb Height

- 4" Curb
- 6" Curb

Head Flashing Width

_____ in. 2/12 pitch required

NOTES



SKYLITES + SUNROOMS + RAILINGS

EVERETT

phone: 1-800-666-6065
fax: 425-258-6734

SPOKANE

phone: 1-800-382-5403
fax: 509-921-2137

SALEM

phone: 1-800-664-1257
fax: 503-391-0974